



# Safe 'n' Silent™ Pro



## General Product Information

ROCKWOOL stone wool products are made of basalt, a volcanic stone.

ROCKWOOL stone wool products are non-combustible with a melting point approximately 1000°C. They are particularly suitable for thermal insulation, fire protection and sound reduction or absorption.

ROCKWOOL stone wool is inorganic and contains no nutritious substance. Therefore it will not be attacked by microorganisms. Stone wool will not rot and does not attract vermin.

No CFCs, HFCs, HCFCs, or asbestos are used in the manufacture of ROCKWOOL stone wool products.

## Applications

ROCKWOOL Safe 'n' Silent Pro is designed and manufactured to achieve excellent acoustic insulation performance in all types of drywall partition configurations as well as for concrete soffit application. It is recommended to be used for drywall partition applications in hospitals, cinemas, schools, offices, residential and industrial buildings.

Selected products in the Safe 'n' Silent Pro range are recommended for application in building condensation control of concrete soffit where there are noticeable temperature differences on each side. An example for this would be in car parks and

buildings with air conditioned server room, data center or cold storage facilities.

Safe 'n' Silent Pro meets the requirements of Noise Criteria (NC) specifications developed by the ROCKWOOL company. NC comprehensively measures the noise levels of a room and with the use of NC ratings, recommends the desired acoustic comfort level of a room/space.

It also has a thermal conductivity (k value) of 0.034 W/mK, according to ASTM C518 standard test method.

## Facings

Optional facing with one or two sided glass tissue is available upon request for perforated wall panel. A variety of facing options are available for application in concrete soffit.

For more information, please contact your local representatives.

## Packaging and Storage

ROCKWOOL Safe 'n' Silent Pro is shrink-wrapped in polyethylene sheets for ease of handling, transportation, storage and identification.

Products should be stored indoors or under waterproof covering.


**Technical Parameters**

Product Name	Safe 'n' Silent Pro 330	Safe 'n' Silent Pro 350	Safe 'n' Silent Pro 370	Safe 'n' Silent Pro 380	Standards
Noise Absorption Co-efficient at 50mm (NRC)	0.90	1.00	1.00	1.00	EN ISO 354 / ASTM C 423-01
Fire Performance	Non-combustible / A1 Fire Classification	Non-combustible / A1 Fire Classification	Non-combustible / A1 Fire Classification	Non-combustible / A1 Fire Classification	EN13501-1
Melting Point	More than 1000°C	More than 1000°C	More than 1000°C	More than 1000°C	ASTM E794
*Thermal Conductivity 20°C λ Value (W/mK)	0.036	0.035	0.034	0.033	ASTM C518
R-value at 50mm thickness thickness (m <sup>2</sup> K/W) Water	1.389	1.429	1.471	1.515	
Water Absorption (partial immersion)	1.0kg/m <sup>2</sup>	0.5kg/m <sup>2</sup>	0.5kg/m <sup>2</sup>	0.5kg/m <sup>2</sup>	EN1609.97
Water Vapor Absorption	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	Less than 0.04 Vol %	ASTM C1104/ C1104M
Thickness	50, 75, 100mm	**50, 75, 100mm	**50, 75, 100mm	50, 75, 100mm	EN822
Applications	Recommended for commercial applications such as retail and office partition walls	Recommended for all drywall partition applications and able to meet basic requirement of condensation control on soffit	Recommended for drywall with high acoustic insulation requirement. Also recommended for condensation control applications on soffit, installed with rust-proof fasteners, providing additional mechanical strength where product rigidity is needed	Recommended for drywall with high acoustic insulation requirements	

\* Thermal conductivity values are based on testing conducted in external accredited laboratory in accordance to ASTM C518 : 1991. Test reports are available upon request. For design, it is recommended to use a safety factor of 20% as design value.

\*\*100mm thickness only applicable for drywall partition application

Note: For UL approved products, please contact our local representative Aural Exchange.

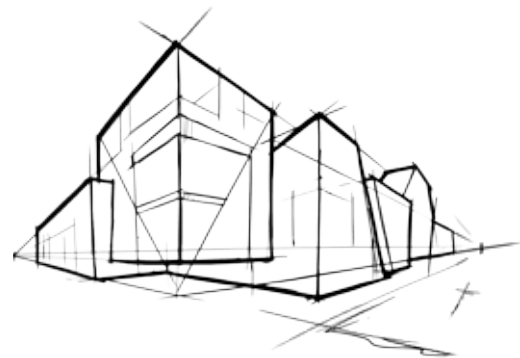

G00085  
G00094  
G00095  
SGBP 2018-1622



SGBP 2018-1897  
SGBP 2018-1898



\*Note: EUCEB only applicable for products produced in India & Malaysian factories

Disclaimer: The information contained in this data sheet is believed to be correct at the date of publication. ROCKWOOL does not accept responsibility for the consequences of using Safe 'n' Silent Pro in applications different from those described above.

**Indonesia Representative Office**  
**Malaysia Sdn Bhd**  
Wisma Pondok Indah Tower 3  
17th Floor, Jl. Sultan Iskandar Muda V  
Jakarta 12310, Indonesia  
T (+62) 21 2965 8071

**ROCKWOOL Malaysia Sdn Bhd**  
Lot 4, Solok Waja 1  
Bukit Raja Industrial Estate  
41050 Klang, Selangor, Malaysia  
T (+60) 3 3341 3244

**ROCKWOOL Building Materials**  
**(Singapore) Pte. Ltd**  
No 7, Tuas Avenue 1, Jurong Town,  
Singapore 639492  
T (+65) 6861 5722

**India Representative Office**  
**Aural Exchange**  
5th Floor B Wing  
Ackruti Trade Centre, MIDC  
Mumbai  
T (+91) 8779064294